

Medium and Heavy Duty Residential and Commercial Use

ANSI 156.4 Grade 1, 2 Million Cycles, UL 10C 3 Hours

Cast Aluminum Body

TRI Packed

Arms available, hold open, cush with stop, track

Power Adjustable Sizes 1-4 and 3-6

1-4 Barrier Free Interior and Exterior

Adjustable Closing and Latching Speed, BC Function, DA Function Optional

Finishes:

Aluminum and bronze

LAWRENCE® HARDWARE INC.

1 - 800 - 435 - 9568


5000 Series

MED/HVY DUTY CLOSER

Grade 1

Regular Arm Installation

Closer mounted on door. Arm iamb bracket on frame face.

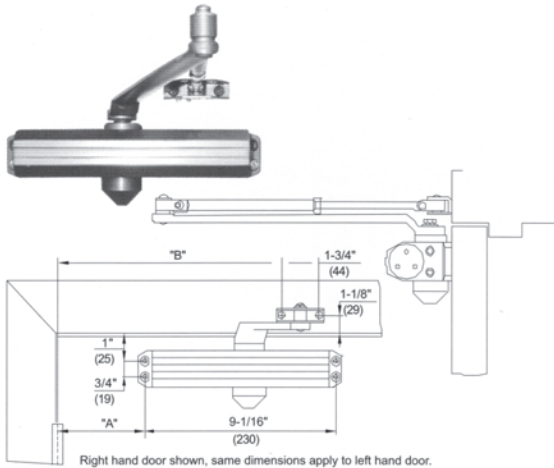


Right hand door shown, same dimensions apply to left hand door.

OPENING	DIM."A"CLOSER		DIM."B"ARM SHOE	
	INCHES	MM	INCHES	MM
TO 100°	7"	(178)	13"	(330)
100° TO 120°	6"	(152)	12"	(305)
OVER 120°	3-1/2"	(89)	9-1/2"	(241)

Top Jamb Installation

Closer mounted on frame face. Arm jamb bracket on door top rail.

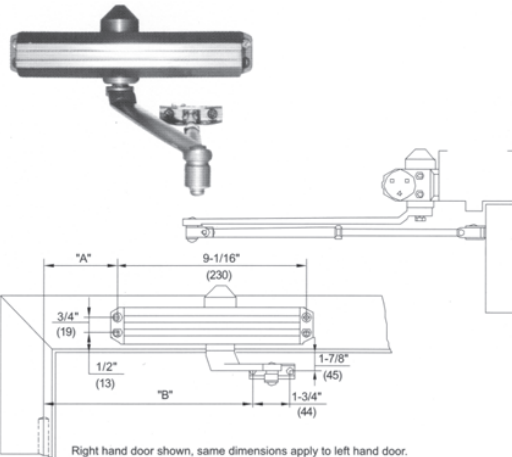


Right hand door shown, same dimensions apply to left hand door.

OPENING	DIM."A"CLOSER		DIM."B"ARM SHOE	
	INCHES	MM	INCHES	MM
TO 100°	7-1/2"	(191)	13-1/2"	(343)
100° TO 120°	6"	(152)	12"	(305)
OVER 120°	3-1/2"	(89)	9-1/2"	(241)

Parallel Arm Installation

Closer mounted on door. Bracket on frame soffit.

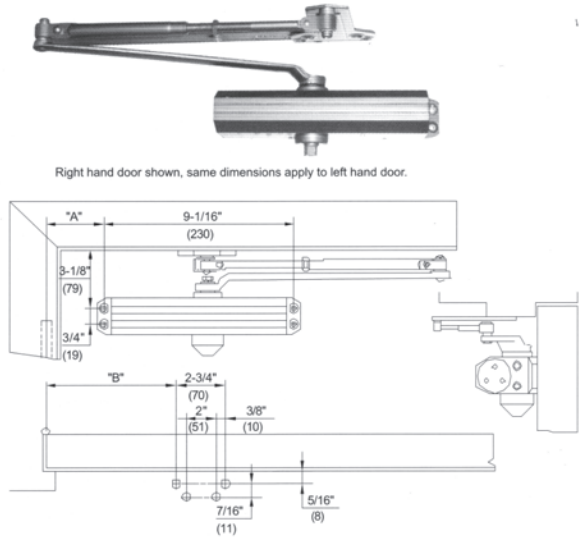

Right hand door shown, same dimensions apply to left hand door.

OPENING	DIM."A"CLOSER		DIM."B" PA BRACKET	
	INCHES	MM	INCHES	MM
TO 100°	7-5/8"	(194)	9-1/4"	(235)
100° TO 120°	6-1/8"	(156)	7-3/4"	(197)
OVER 120°	4-1/8"	(105)	5-3/4"	(146)

		DOOR		MAXIMUM DOOR SIZE					
		TYPE OF INST	*	3'	3'	4'	4'	4'	
				(0.85M)	(0.90M)	(1.00M)	(1.10M)	(1.20M)	
5014 (1-4)	INDOOR	RA T.J.	FULL 360° TURNS OF POWER ADJUSTMENT SHAWT	1	1	2	3	3	
		RA		2	2	3	4	5	
	EXDOOR	RA T.J.		5	6	8	NOT RECOMMENDED		
		RA		8	9	12	NOT RECOMMENDED		
5036 (3-6)	INDOOR	RA T.J.	FULL 360° TURNS OF POWER ADJUSTMENT SHAWT	2	4	6	9	11	
		RA		3	5	7	10	13	
	EXDOOR	RA T.J.		3	5	7	10	13	
		RA		5	7	10	14	16	

■ 18-360; TURNS MAXIMUM AVAILABLE
† R.A. Regular Arm T.A. Top Jamb P.A. Parallel Arm

APPLICABLE DOOR WEIGHT CHART		
MODEL	DOOR WIDTH	DOOR WEIGHT
5014 sizes 1-4	800 - 1200 (32" - 48")	15-85
5036 sizes 3-6	800 - 1500 (32" - 60")	15-150